

**dröm**<sup>®</sup>  
sauna steam spa



A WORLD OF WELLBEING

Dröm UK Ltd. Dröm House, Abbot Close, Byfleet, Surrey, KT14 7JN.

Tel: 01932 355 655 | Fax: 01932 355651

Email: [info@dromuk.com](mailto:info@dromuk.com) | [www.dromuk.com](http://www.dromuk.com)

[WWW.DROMUK.COM](http://WWW.DROMUK.COM)

# Steam saunas for public facilities.

For large steam saunas in a hotel, spa or public swimming pool, you can combine a Tylö sauna heater with a Tylö VA steam generator. This enables you to offer traditional sauna bathing and the gentler sensation of a steam sauna in one and the same room.

Another advantage of steam saunas is that this bathing form eliminates the problems associated with scorched panels that are such a common headache in public facilities. In other words, a steam sauna not only offers bathers more alternatives, it also helps minimise maintenance costs.

Choosing the desired bathing mode is simple. Just key in the temperature and humidity values (for example, 45–65°C and 40–65% RH for steam saunas) on the control panel. These settings will then remain constant during the entire bathing cycle. Afterwards, an automatic air-drying function is activated to reduce humidity to a normal level.



## Control panels CC

Electronic model for remote or touch-control operation. May also be connected to an external switch or computer, or used to turn the sauna on and off via a phone line. Features include an energy-saving divided output and automatic drying function after a steam sauna. Control panels must be combined with a suitable sauna heater, relay box and steam generator as shown in the table below.



### CC 20 (Art. 7121 3010)

Light diodes indicate temperature, humidity and time settings on a 1–10 scale. Max. 3–10 hours running time. 0–10 hour preset. Size: 100 x 150 mm, depth 30 mm. IP 24.

### CC 20 Recessed (Art. 7101 3035)


As above, but for installation recessed into the wall.



### CC 300T (Art. 7111 5155)

Switchable to run between 0.5 and 24 hours and has a display that indicates temperature, humidity, remaining operating

## The principle behind a steam sauna installation

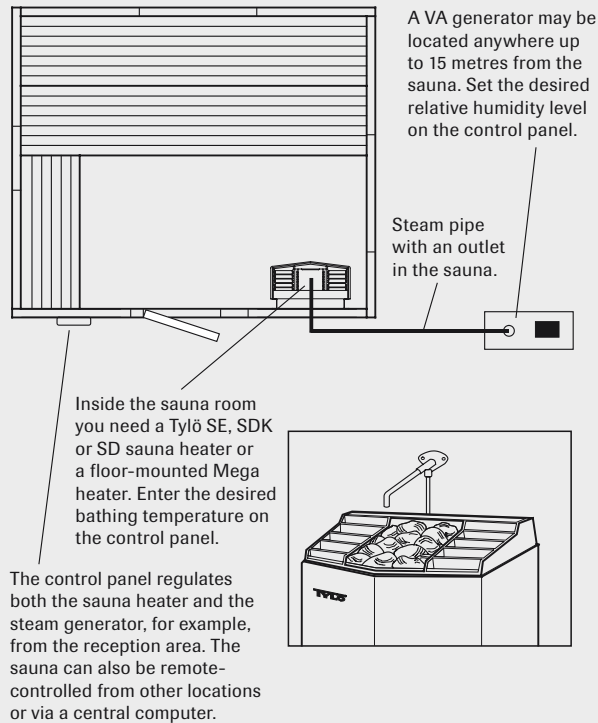

**Read more about Tylö sauna heaters and steam generators for professional use under the relevant section.**

time, day and time. In addition the CC 300T is equipped with a switch for lighting, English instructions, and memory, security code and energy-saving stand-by functions. Thanks to the integral weekly timer, the CC 300T also offers optional automatic on/off operation and stand-by mode at preselected times on the days of your choice. The control panel can be operated from an external control point. Size: 130 x 190 mm, depth 27 mm. Protection class: IP 24.

### Stand-by function saves energy – and money!

During off-peak hours the sauna can be set at stand-by heat. This can then be rapidly increased to the desired temperature when bathers arrive.

Stand-by operation saves substantial sums every year.

## Combination table

Sauna volume min/max (cu.m.)	Sauna heater type (kW)	Relay box (see page 63)	Steam generator (see pp. 114–115) type (kW)	Control panel (see above)
6 – 12	SE 8 (8)	–	6 VA (6) or 6 VB (6.6)	CC 20 or CC 300T
10 – 18	SDK 10 (10,7) or EP 100 (10)	RB 30	6 VA (6) or 6 VB (6.6)	
15 – 35	SD 16 (16) or EH 150 (15)	RB 30	9 VA (9)	
22 – 43	SD 20 (20) or EZ 225 (22)	RB 60	12 VA (12)	